



# Automatic Balancing Valve



Automatic Flow Limiter • Isolation Ball Valve • Union • 600 WOG

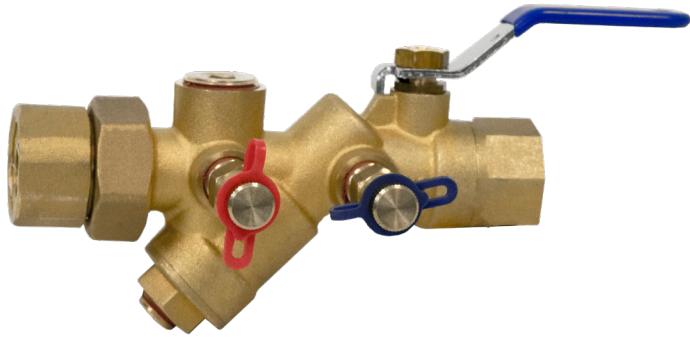

TA1

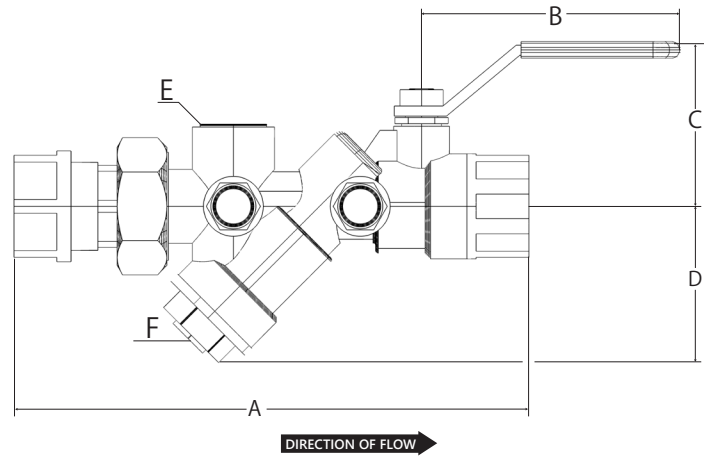


## Features

- +/- 5% Accuracy
- Two pressure / temperature (PT) test ports
- Location tag
- Two additional accessory taps
- Triple sealing stem with 2 Viton® o-rings and Teflon® seal
- Blow out proof stem
- 100% leak tested

## Pressure and Temperature Rating

- 600 WOG
- 325°F Max

## Smart Part Number Ordering Guide

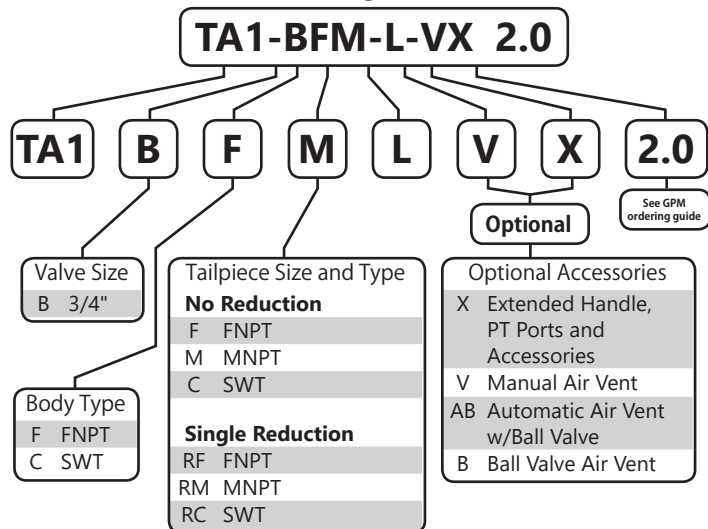

## Material Specifications

Part	Material
Body	Brass - C85700
End Connection	Brass - CW617N
Ball	Chrome Plated Brass - CW617N
Seat (2)	PTFE
Stem	Brass - CW617N
Packing	PTFE
Stem O-ring (2)	Viton®
Packing Gland	Brass - CW617N
Handle	Steel - Zinc Plated
Handle Nut	Brass - CW617N
Service Cap	Brass - CW617N
Service Cap O-ring	Viton®
Union Gasket	EPDM
Tail Piece	Brass - C37700
Union Nut	Brass - C37700
Balancing Cartridge	Stainless steel, EPDM
Cartridge Retaining Spring	Stainless Steel

## Dimensions

Size	Flow Range	A*	B	C	D	E	F
3/4"	Low Flow	6.28	3.08	2.00	1.86	0.50	0.25
3/4"	High Flow	6.28	3.08	2.00	1.86	0.50	0.25

\*Length is for a SWT x MNPT valve, additional dimensions available upon request

## GPM Ordering Guide

Size	Cartridge	GPM							PSI	
3/4"	C1-L	0.33	0.50	0.75	1.00	1.50	2.00	2.50	3.00	2-32
Low										
3/4"	C1-H	4.00	5.50	-	-	-	-	-	-	5-60
Low										

Pressure range varies, see PSI column



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).